




# SRX906LA BP

Base Plate for SRX906LA Arrays

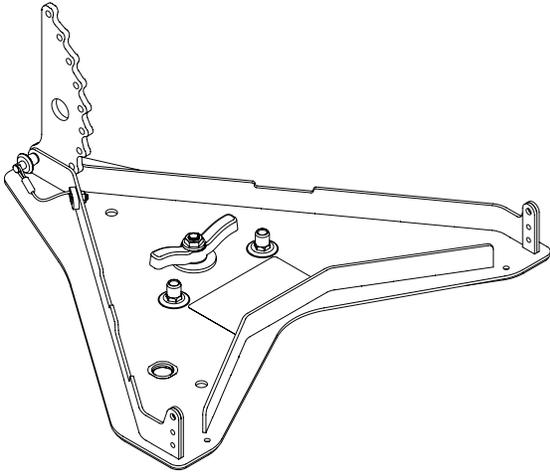


## HIGHLIGHTS


- Enables ground stacking SRX906LA arrays
- Allows attaching arrays to subwoofers
- Universal M20 threaded pole mount
- Angle range: -15 degrees to +5 degrees
- Compatible with VTX PM pole mount adapter
- Support for up to (6) SRX906LA

## DESCRIPTION

The SRX906LA Base Plate is a universal adapter frame that enables SRX906LA arrays to be ground stacked on top of compatible subwoofers or support structures such as stages, scaffolding, or carts. Using the included M20 screw, the SRX906LA BP connects to any supported subwoofer equipped with a standard M20 pole mount adapter, such as the SRX918S or the SRX928S. The rear angle selection bar allows for angles ranging from -15 to +5 degrees. The three included M10 through-holes can be used to permanently attach an SRX906LA array to other support structures. The base plate can be used in conjunction with the Pole Mount (JBL-P3312MX) adapter to pole mount up to two SRX906LA cabinets. Configurations and load conditions for using the SRX906LA BP can be obtained using JBL Line Array Calculator 3 prediction software. For more information about the base plate and use cases refer to the **SRX900 Series Rigging Manual**.

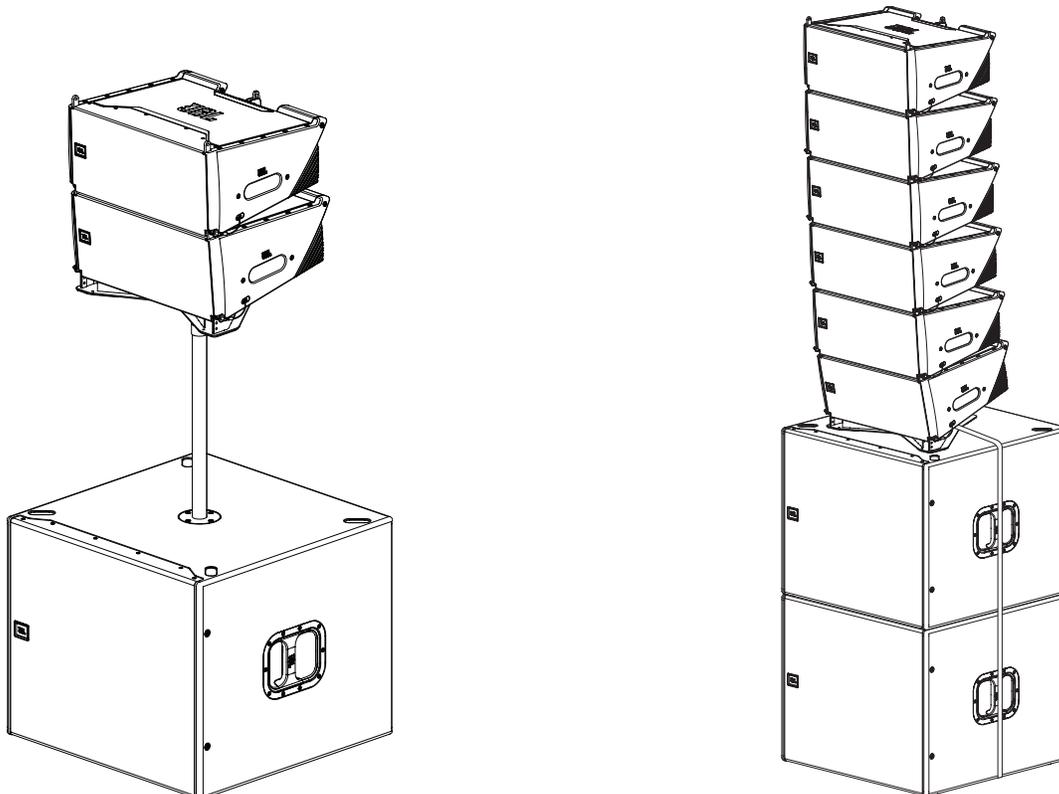

**DIMENSIONS**

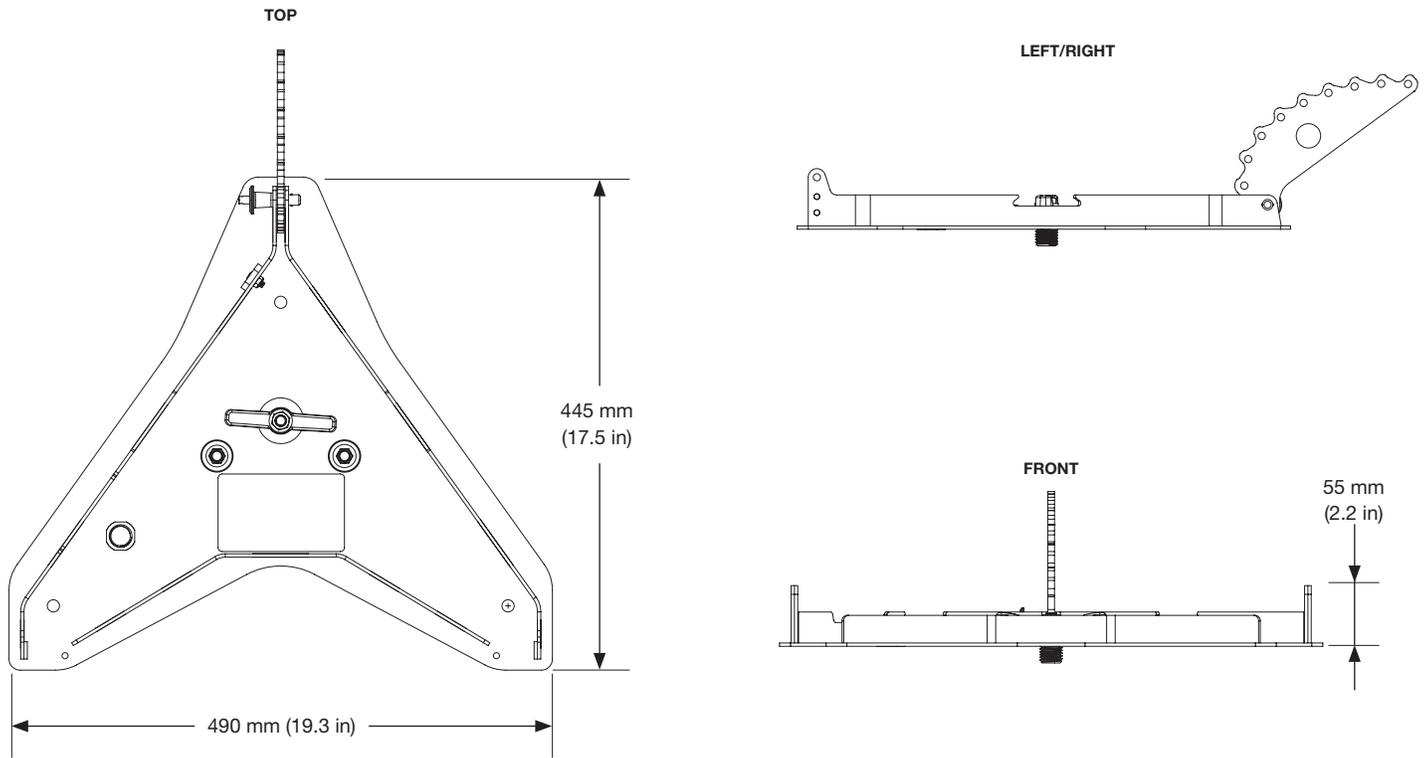

**TECHNICAL SPECIFICATIONS**

PHYSICAL	
<b>Construction :</b>	High-grade steel with anti-corrosion coating
<b>Finish :</b>	Black powder coat
<b>Mechanical Limits<sup>1</sup></b>	
<b>Safe Limit :</b>	(2) SRX906LA
<b>Maximum Limit :</b>	(6) SRX906LA
<b>Dimensions (H x W x D)<sup>2</sup>:</b>	55 mm x 490 mm x 445 mm (2.2 in x 19.3 in x 17.5 in)
<b>Net Weight<sup>3</sup> :</b>	4.2 kg (9.3 lbs)
<b>Shipping Weight :</b>	6.3 kg (14 lbs)
ORDERING INFORMATION	
<b>SKU :</b>	JBL-P3233MX   SRX906LA BP
<b>Included :</b>	(1) Base Plate   (1) M20 Thumb Screw #5118612

**Footnotes:**

- 1: Always use JBL Line Array Calculator 3 software to check mechanical safety when using the SRX906LA Base Plate. For more information on Safe and Maximum Limits, refer to the **SRX900 Rigging Manual**.
- 2: Refer to the 2D and 3D Customer Drawings for more detailed dimensions.
- 3: Weight includes SRX906LA BP only.

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.