

iDS-6716HUHI-M TurboHD Encoder



- Deep learning-based motion detection 2.0 for all analog channels
- Deep learning-based perimeter protection
- Efficient H.265 pro+ compression technology
- Encoding ability up to 8 MP @ 8 fps, 5 MP @ 12 fps
- 5 signals input adaptively (HDTV/AVD/CVI/CVBS/IP)


▪ Specification

Motion Detection 2.0	
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms; Quick search by object or event type is supported;
Perimeter Protection	
Human/Vehicle Analysis	Up to 4-ch
Recording	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	Main stream: 8 MP@8 fps/5 MP@12 fps/3K@12 fps/4MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) Sub-stream: WD1/4CIF/CIF@25 fps (P)/30 fps (N)
Video Bitrate	32 Kbps to 10 Mbps
Dual-stream	Support
Stream Type	Video, Video & Audio
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Video and Audio	
IP Video Input	8-ch (up to 24-ch) Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras
Analog Video Input	16-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTV I Input	8 MP@15 fps, 5 MP@20 fps, 3K@20 fps, 4 MP@30 fps, 4 MP@25 fps, 3 MP@18 fps, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps
AHD Input	5 MP, 4 MP, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps
HDCVI Input	4 MP, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30 fps
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Audio Input	1-ch (up to 16-ch is optional), RCA (2.0 Vpp, 1 KΩ) 16-ch via coaxial cable
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the audio input)
Network	
Network Protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Remote Connection	128
Network Interface	1, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
SATA	2 SATA interfaces
Capacity	Up to 10 TB capacity for each disk
Serial Interface	RS-485 (half-duplex)
General	
Power Supply	12 VDC, 5 A

Consumption	≤ 19 W
Working Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
Weight	≤ 2.1 kg (4.6 lb)

Physical Interface

No.	Description	No.	Description
1	VIDEO IN	5	RS-485 serial interface
2	AUDIO IN, RCA connector	6	12 VDC power input
3	AUDIO OUT, RCA connector	7	Alarm I/O
4	LAN network interface	8	GND

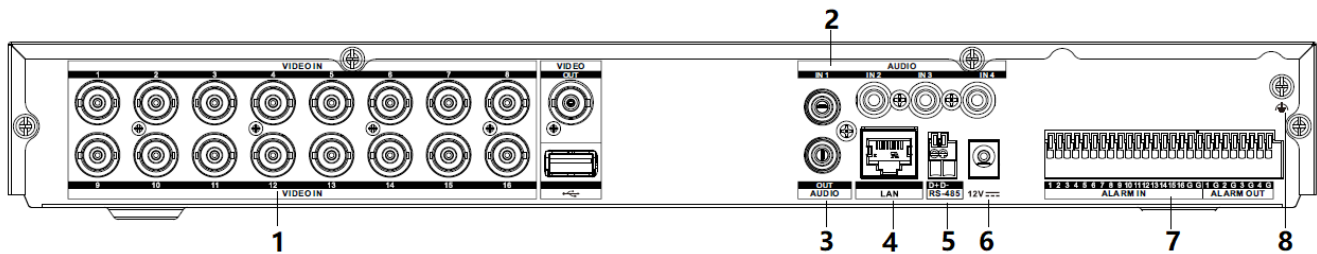

Available Model

iDS-6716HUHI-M

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

