



Curtain Outdoor Jeweller

Wireless dual technology curtain motion detector for outdoor and indoor use



2
GRADE
EN 50131


PD 6662
2017

IP55



Advanced detection

- Two IR and one microwave sensors
- Motion detection range adjusted with a slider at the device enclosure
- Vertical viewing angle: 85° without blind spots under the detector¹
- Horizontal viewing angle: 8°



Smart features

- Installing the detector perpendicular or parallel to the surface with SmartBracket or angle mount
- Allowed movement direction feature in **Night Mode**²
- **Pet immunity**: the device ignores pets below 100 cm in height




Sabotage protection

- Anti-masking system that meets the Grade 2 requirements³
- Tamper alarm and a built-in accelerometer to notify of an attempt to dismantle the device
- Protection against spoofing with device authentication
- Holding screw to secure the detector on SmartBracket




Eliminating false alarms

- IR sensors alarm verification with a K_a-band microwave sensor
- Three sensitivity levels: selectable in the app
- **SmartDetect** and **dual technology motion detection** algorithms for false alarms prevention
- Temperature compensation for effective motion detection at temperatures from **-25 °C to +60 °C**

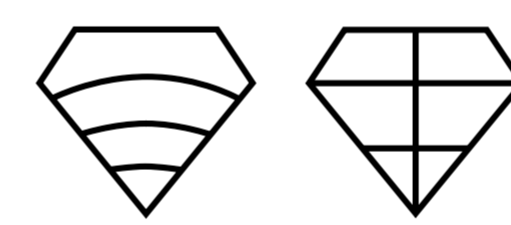

Jeweller and Wings wireless communication

- Wireless communication range: up to 1,700 m
- Block cipher encryption for advanced data protection
- Regular polling to check the current state of the device
- Frequency hopping to prevent interception and jamming



Hassle-free installation

- Pairing with the hub by scanning the QR code
- Remote control and configuration in Ajax apps
- Calculated battery life: up to 3 years
- No need to disassemble the enclosure during the installation
- Bundled hood to protect from rain and snow

Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

<p>Compliance with standards</p> <p>EN 50131 (Grade 2) PD 6662:2017</p>	<p>Compatibility</p> <p>Hubs Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub BP Jeweller Hub Hybrid (2G) Hub Hybrid (4G)</p> <p>Range extenders ReX 2 Jeweller</p>	<p>Communication with a hub</p> <p>Jeweller communication technology</p> <p>Wings communication technology</p> <p>Communication range up to 1,700 m In an open space</p> <p>Frequency bands 866.0–866.5 MHz 868.0–868.6 MHz 868.7–869.2 MHz 905.0–926.5 MHz 915.85–926.5 MHz 921.0–922.0 MHz Depends on the sales region</p>	<p>Detection</p> <p>Motion detection distance up to 8–12 m (when installed at a height of 1–2.4 m)</p> <p>Motion detection angles vertical: 85° (15° when installed at a height of 1 m) horizontal: 8°</p> <p>Motion detection speed 0.3 to 2.0 m/s The direction of the detector lens should be perpendicular to an alleged intrusion path into the facility.</p>
<p>Power supply</p> <p>Battery 2 × CR123A (pre-installed)</p> <p>Calculated battery life up to 3 years</p>	<p>Enclosure</p> <p>Color white</p> <p>Dimensions 141 × 60 × 72 mm (without angle mount) 141 × 76 × 84 mm (with angle mount)</p> <p>Weight 223 g (without angle mount) 257 g (with angle mount)</p>	<p>Installation</p> <p>Operating temperature range from –25 °C to +60 °C</p> <p>Operating humidity up to 95%</p> <p>Protection class IP55</p> <p>Installation height 2.4 m (1 m when pet immunity is enabled)</p>	<p>Complete set</p> <p>Curtain Outdoor Jeweller SmartBracket mounting panel Hood 2 × CR123A battery (pre-installed) Angle mount Installation kit Quick start guide</p>




¹ 15° when installed at a height of 1 m.

² If the system is in **Night Mode** and a person leaves the premises and returns within the specified time, the system will not raise the alarm.

³ The device recognizes anti-masking only for IR sensors. Masking detection for microwave sensors is not supported.



For detailed information, scan the QR code or follow the link:
ajax.systems/support/devices/curtain-outdoor-jeweller/

-  support@ajax.systems
-  @AjaxSystemsSupport_Bot
-  ajax.systems