



# Structured Cable Products™

Quality Installations Deserve Quality Products

www.spcat5e.com  
 sales@spcat5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

## SCP PART#: 12/2OFC-HD-XX-D


### DESCRIPTION:

Dca EUROCLASS- INDOOR/OUTDOOR SPEAKER CABLE- C/12 AWG 65 STRAND OXYGEN FREE COPPER, UL CMR, EN50575:2014 Dca-s3,d2,a3 SUN RES HD PVC JKT- 500 FT/152M SPOOL

### Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)  
 EU RoHS 2011/65/EU Compliant  
 EN50575: 2014 REACTION TO FIRE CLASS Dca - s3, d2, a3

Application: Speaker Cable

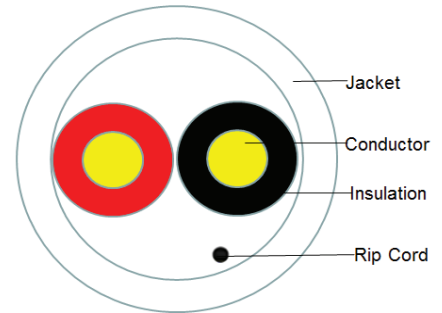

<b>Part Number:</b>	<b>Jacket Color:</b>
12/2OFC-HD-BK-D	Black
12/2OFC-HD-WT-D	White

### Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 4C(3.28mm <sup>2</sup> )
	Construction	65/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.1mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	8.3mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/150mm	

### Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Conductor Resistance	Max 5.8 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	300V
800V/min	800V/min
Impedance(near by)	77±5Ω
Capacitance(near by)	20±3pf/ft

Marking:			
STRUCTURED CABLE PRODUCTS --- 12/2OFC-HD-D--- E198137 SCP3 (UL) CL3 C(UL) CMR 4C 12AWG 65 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca-s3,d2,a3, HD-PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
17 kgs/37.478 lbs	310X340X350	500FT/Spool	27