



# Structured Cable Products™

Quality Installations Deserve Quality Products


www.scp5e.com  
 sales@scp5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

**SCP PART#: SP-1.5/2-LSZH-WT** UPC: 817777015317

**DESCRIPTION:**

COMMERCIAL SPEAKER CABLE - B2ca RATED - 2 COND/1.5mm<sup>2</sup> (16awg) 30x0.25mm (STANDARD CLASS 5) OXYGEN FREE COPPER, EN50575:2014 B2ca-s1a,d1,a1 LOW SMOKE ZERO HALOGEN - WHITE JKT- 305M/1000FT SPOOL

Conductor 30\*0.25±0.008mm Bared copper  
 Insulation LSZH  
 OD:2.20±0.05mm  
 Color: Red,Black  
 Cabling Color: Red- Black  
 Rip-cord Stranded rip-cord  
 Jacket LSZH  
 Thickness: 0.7mm Nom.  
 Color :White(RAL9003)  
 O.D.:5.8±0.2mm

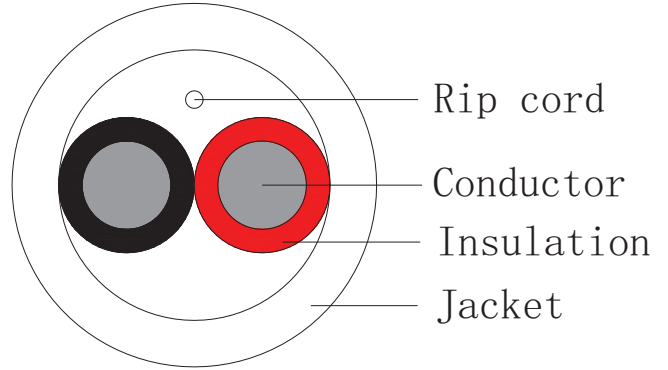

Marking: STRUCTURED CABLE PRODUCTS -- SP-1.5/2-LSZH -- 2C/1.50mm<sup>2</sup> (16AWG) 30x0.25mm  
 STRAND OXYGEN FREE COPPER LSZH JKT EN50575:2014 CE B2ca-s1a,d1,a1 RoHS  
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M MM/YY

NOTE: \*\*\*m means continuous length.

**Sheath Physical Properties**

Before Aging:	Tensile Strength(Mpa)	≥ 10.0
	Elongation(%)	≥ 125
Aging Period:	100℃ × 168h	
After Aging :	Tensile Strength(Mpa)	≥ 8.0
	Elongation(%)	≥ 100

**Electrical Characteristics(20℃)**

Conductor DC Resistance: ≤ 13.7Ω/km

**Other Characteristics**

Minimum Installation Temperature: -20℃  
 Operating Temperature Range: -20℃ ~+80℃  
 Rated Voltage: 300V  
 Test Voltage: 800V/min  
 Minimum Bend Radius: 8 × O.D.

**Packing Information**

Packing length: 305m(1000ft)  
 Packaging: Wooden Reel;  
 Packing Weight: N.W. 15.9kgs , G.W. 16.90kgs  
 Dimension: 37cm x 37cm x20cm  
 45 reels each pallet