

# IL01 43"/55"

## Smart Interactive Signage



The **germ-resistant display** allows to safely interact on the touchscreen thanks to the nano ionic silver formula coating, which is 99.9% efficient against common germs (TÜV Rheinland certified).



With the **X-Sign Content Management** Software you can edit, manage and customise content with 150+ templates, and display it directly on the screen from a USB Drive.



Display content both in **portrait or landscape** mode, for a wide range of interactive signage applications thanks to the increased flexibility.



Combined with DMS Cloud and DMS Local, BenQ's **Device Management Solution** helps you easily manage all your BenQ displays at the same time.

MODEL		IL4301	IL5501	
Panel	Screen Size	43"	55"	
	Resolution	UHD 3840 x 2160	UHD 3840 x 2160	
	Brightness (Typ.)	400 nits	400 nits	
	Contrast Ratio (Typ.)	1200: 1	1300: 1	
	Viewing Angle (H/V)	178 degree (H) / 178 degree (V)	178 degree (H) / 178 degree (V)	
	Response Time (G-t-G, ms)	8	9	
	Backlight Life (hrs)	40,000	50,000	
	Panel Surface	AG, Haze 1%	AG, Haze 3%	
	Operating Hour	24 hrs / 7 days	24 hrs / 7 days	
Touch Solution	Orientation	Landscape / Portrait	Landscape / Portrait	
	Touch Technology	Infrared Touch	Infrared Touch	
	Touch Points	40	40	
	Resolution	32768 x 32768	32768 x 32768	
Platform Solution	System Memory	3GB	3GB	
	Storage	32GB	32GB	
	OS	Android 8.0	Android 8.0	
	Power	Power Supply	100V~240V, 50-60Hz	100V~240V, 50-60Hz
Power	Power Consumption	Maximum (W/h)	150	230
		Typical (W/h)	82	111
		Standby Mode (W/h)	<0.5W	<0.5W
	AC Power Switch	Yes	Yes	
	Wake Up	HDMI / LAN	HDMI / LAN	
	Environment	Operation Temperature	0°C ~ 40°C	0°C ~ 40°C
Connectivity	Operating Humidity	20% ~ 85% RH Non-Condensing	20% ~ 85% RH Non-Condensing	
	Energy Efficiency	Energy 8.0 Certified	Energy 8.0 Certified	
	Input	VGA / HDMI / Display Port	x 1 / 2.0 x 2 / 1.2 x 1	x 1 / 2.0 x 2 / 1.2 x 1
	Output	HDMI	2.0 x 1	2.0 x 1
	USB	Type A / Type B	2.0 x 2 / 2.0 x 1 (For Touch)	2.0 x 2 / 2.0 x 1 (For Touch)
	LAN	Yes	Yes	
	Remote Controller	Yes	Yes	
	Audio	Internal Speaker	10W x 2	10W x 2
Mechanical	Dimension (mm)	Screen	1011.0 x 599.2 x 97.4	1284.1 x 754.9 x 92.6
	Weight (kg)	Net Weight / Gross Weight	18.8 / 24.0	29.1 / 35.2
	Bezel Width (mm)		16.6 / 16.6 / 16.6 / 16.6	16.6 / 16.6 / 16.6 / 16.6
	Wall Mounting (VESA) (Screw Type / Max. Length)		200 x 400 mm (4 holes); 4 x M6 x 8L	400 x 400 (4 holes); 4-M6 x 15L
	OPS Slot		x 1	x 1
	Unique Software Support	Wireless Presentation	InstaShare	InstaShare
Media Content		X-Sign	X-Sign	
Digital Broadcasting		X-Sign Broadcast	X-Sign Broadcast	
Video Conferencing		Teamviewer Meeting	Teamviewer Meeting	
Device management		DMS Cloud/Local	DMS Cloud/Local	




→ Specifications subject to change without notice. Please contact your local BenQ office for the full BenQ product range.


**BenQ**

# INPUT AND OUTPUT TERMINALS


## SIDE I/O

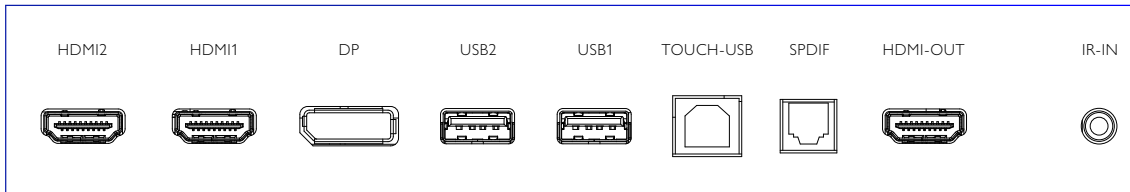


## BOTTOM I/O

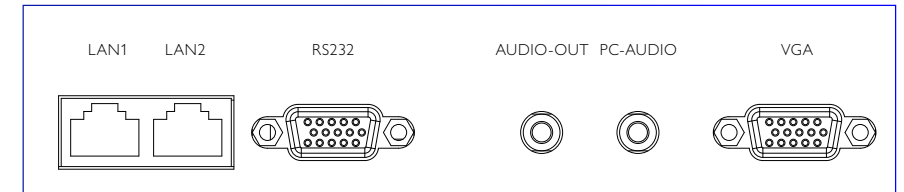


# DIMENSIONS

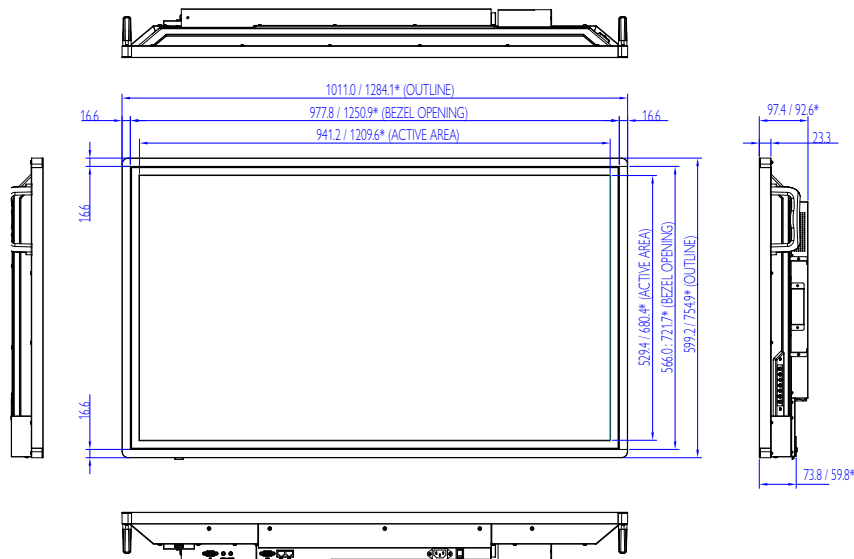

IL4301

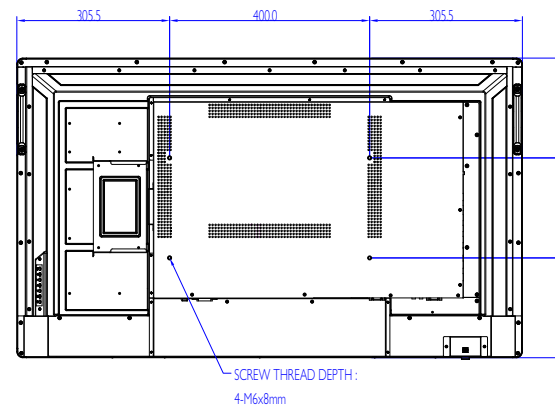

\*IL5501

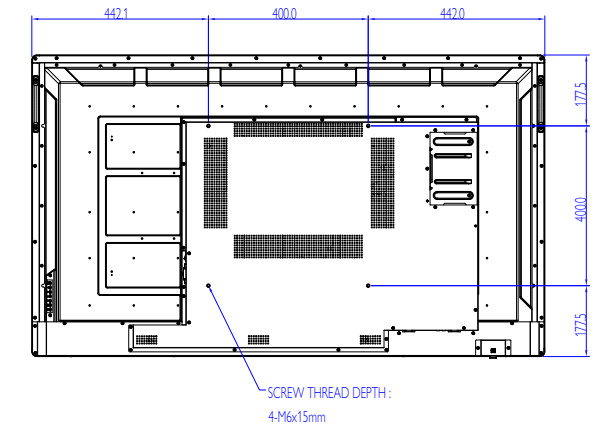

[www.benq.eu/en-eu/business/index.html](http://www.benq.eu/en-eu/business/index.html)



© 2022 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

**BenQ**