

DS-KD8003-IME1(B) KD8 Series Modular Door Station



- Main unit of modular door station 2 MP fisheye Camera with IR Supplement One call Physical Button For easier calls 4. Two-lock control 5. Standard PoE power supply 6. IP65 protection level 7. Convenient configuration via Web remotely 8. Directly provide 12 V, 500 mA power output for one electronic lock without additional power supply

▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	256 MB
Processor	Embeded high performance processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	2 MP HD camera
Resolution	2 MP
FOV	Horizontal: 146°, Vertical: 82°
Wide dynamic range (WDR)	Support
Supplement light	Low illumination, IR supplement lights
Video compression standard	H.264
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711 U/G.711 A
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	2000
Face capacity	/
Fingerprint capacity	/
Card capacity	6000
Message capacity	/
Linked indoor station capacity	500
Sub door station capacity	16
Network parameters	
Network protocol	TCP/IP, RTSP
Wi-Fi	/
Bluetooth	/
3G/4G	NA
Device interfaces	
Alarm input	4 (2 exit buttons and 2 door contacts by default)
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
TAMPER	1
Exit button	2 (2 for lock control)
RS-485	1 (1 for Hikvision's sub module communication)
USB	/



No. 333 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T: +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Wiegand	/
TF card	/
Alarm output	/
Lock control	2 relays, Max. 30 VDC, 2 A
Door contact input	2
Two-Wire IP interface	/
General	
Button	1
Installation	Surface mounting, flush mounting
Indicator	/
Weight	Net weight: 380 g Gross weight: 541 g
Protective level	IP65
Working temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Battery	/
Power supply	12 VDC, 500 mA, IEEE 802.3af, PoE
Application environment	Outdoor
Power consumption	≤ 5 W
Language	English, French, Portuguese, Brazilian Portuguese, Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Slovak

▪ Available Model

DS-KD8003-IME1(B)

Headquarters


No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ Dimension

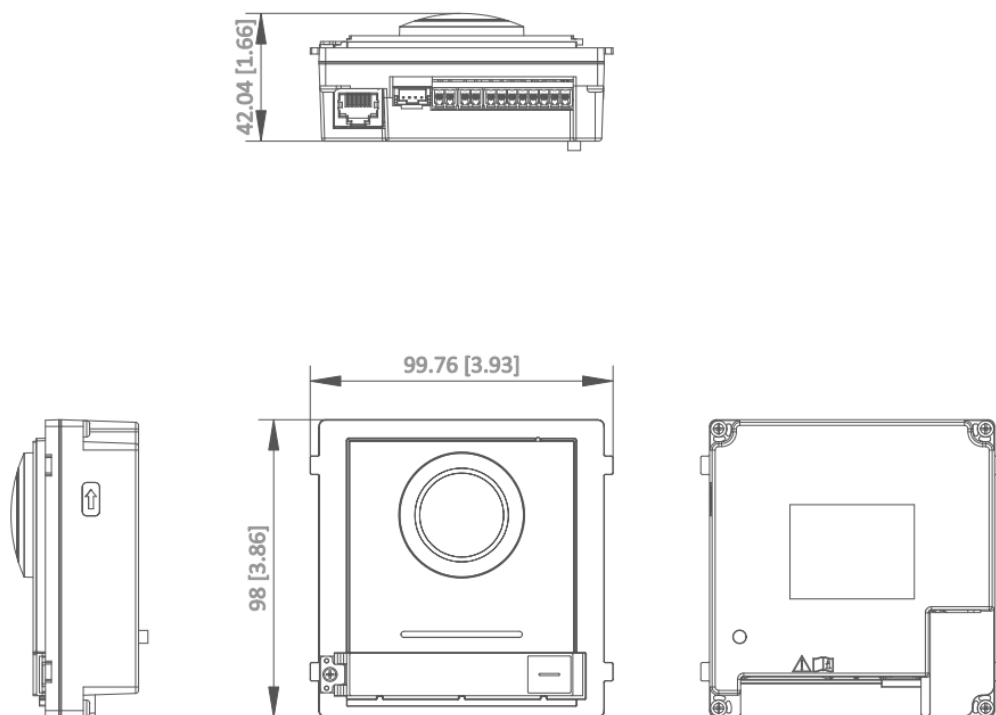

Unit:mm [inch]

SCALE	1:1
-------	-----

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel











hikvisionhq

▪ **Accessory**

▪Optional

<p>DS-KAW50-1 50W 12V Power Adapter</p>	<p>DS-KD-KK KD8 Series Pro Modular Door Station</p>	<p>DS-KD-IN KD8 Series Pro Modular Door Station</p>	<p>DS-KD-BK KD8 Series Pro Modular Door Station</p>	<p>DS-KD-KP KD8 Series Pro Modular Door Station</p>
				
<p>DS-KD-M KD8 Series Pro Modular Door Station</p>	<p>DS-KD-E KD8 Series Pro Modular Door Station</p>	<p>DS-KD-DIS KD8 Series Pro Modular Door Station</p>	<p>DS-KD-ACW1 2nd Video Intercom Brackets</p>	<p>DS-KD-ACW2 2nd Video Intercom Brackets</p>
				
<p>DS-KD-ACW3 2nd Video Intercom Brackets</p>	<p>DS-KD-INFO KD8 Series Pro Modular Door Station</p>	<p>DS-KABD8003-RS1 Rain Shield of Module Door Station</p>	<p>DS-KABD8003-RS2 Rain Shield of Module Door Station</p>	<p>DS-KABD8003-RS3 Rain Shield of Module Door Station</p>
				
<p>DS-KAW50-1N 50W 12V Power Adapter</p>	<p>DS-KD-ACF1/Plastic 2nd Video Intercom Brackets</p>	<p>DS-KD-ACF2/Plastic 2nd Video Intercom Brackets</p>	<p>DS-KD-ACF3/Plastic 2nd Video Intercom Brackets</p>	<p>DS-KD-TDM Touch Display Module with M1 Card Reader</p>
<p>Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com</p> <p>Follow us on social media to get the latest products and solution information.</p>  Hikvision  HikvisionHQ  HikvisionHQ  Hikvision_Global  Hikvision Corporate Channel  hikvisionhq 				

<p>DS-KD-TDE Touch Display Module with EM Card Reader</p>	<p>DS-KDE-ACR3 Video Intercom Brackets</p>	<p>DS-KD-KP#EU KD8 Series Pro Modular Door Station</p>	<p>DS-KD-ACW1#EU 2nd Video Intercom Brackets</p>	<p>DS-KD-ACW2#EU 2nd Video Intercom Brackets</p>
				
<p>DS-KD-ACW3#EU 2nd Video Intercom Brackets</p>			<p>DS-KD-K12 Nametag module</p>	<p>DS-KD-K12/S Nametag module</p>
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

